www.piher.com

EP-08

Bar clamps 80-100



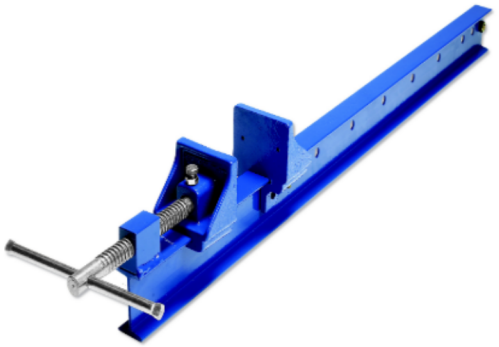

	COD			Kg	
Mod. 80	08100	100 cm	8 cm	11,5	
	08125	125 cm	8 cm	13,0	
	08150	150 cm	8 cm	14,5	
	08175	175 cm	8 cm	16,0	
	08200	200 cm	8 cm	17,5	
	08225	225 cm	8 cm	19,0	
	08250	250 cm	8 cm	20,5	
	08275	275 cm	8 cm	22,0	
	08300	300 cm	8 cm	23,5	
	08325	325 cm	8 cm	25,0	
	08350	350 cm	8 cm	26,5	
	08400	400 cm	8 cm	29,5	
Mod. 100	09100	100 cm	10 cm	16,0	1
	09125	125 cm	10 cm	18,0	
	09150	150 cm	10 cm	20,0	
	09175	175 cm	10 cm	22,0	
	09200	200 cm	10 cm	24,0	
	09225	225 cm	10 cm	26,0	
	09250	250 cm	10 cm	28,0	
	09275	275 cm	10 cm	30,0	
	09300	300 cm	10 cm	32,0	
	09325	325 cm	10 cm	34,0	
	09350	350 cm	10 cm	36,0	
	09400	400 cm	10 cm	40,0	

Mod. 80	80 mm x 42 mm	
	Fuerza Máxima Maximum pressure	15000 N
Mod. 100	100 mm x 50 mm	
	Fuerza Máxima Maximum pressure	15000 N

Main features:

- Steel nut
- Steel double T-section IPN 80/100
- Nodular extra strong cast iron heads
- Steel trapezoidal threaded screw
- Distance between holes—12,5 cm

Materials and Finishing:

All raw materials without exception used in Ind. Piqueras tools come from countries within the European Union. This guarantees maximum quality and permits easy and full control.

FOUNDRY WORK	*-**Nodular cast iron**: EN-GJS-400-15 quality under UNE-En 1563 ruling. Stabilising heat treated, shot blasted, phosphated and electrostatic RAL 5010 blue colour epoxy polyester painted
SECTION	*80x42 mm Y 100X50mm *Double T-section bar clamp IPN 80/100. Top quality steel S275JR S255J2G3 following UN 36521 and EN10025 rules (resistance 27,5 Kgs/mm2) *Single anti-rust blue color paint finish (RAL 5010)
SCREW	*Screws and cross peg in white zinc coated steel without Hexavalent-Chromium

Packing and labelling:

Packeting using plastic band and cling film wrapped
Individually coded label EAN-13

RULES:

No special safety rulings applied
All work carried out following ISO:9001 and ISO :14001 rules