PIHER
www.piher.com

TÜVRheinland® CERT ISO 9001 ISO 14001

EP-17

Rectangular, circular and hexagonal steel band clamp



COD	MOD	Ancho width	Largo Length	Kg	
24002	A	1,2 cm	500 cm	1,29	1
24003	B	2 cm	650 cm	2,09	
24004	C	2,5 cm	800 cm	2,71	

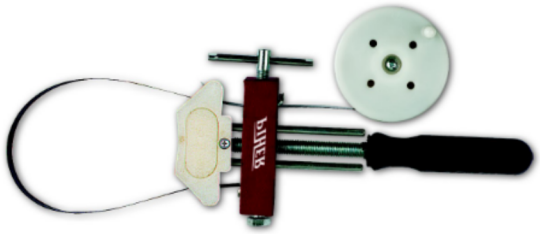

COD	MOD	Ancho width	Largo Length	Kg	
24005	B (aros)	2 cm	650 cm	1,79	1
24006	C (aros)	2,5 cm	800 cm	2,37	

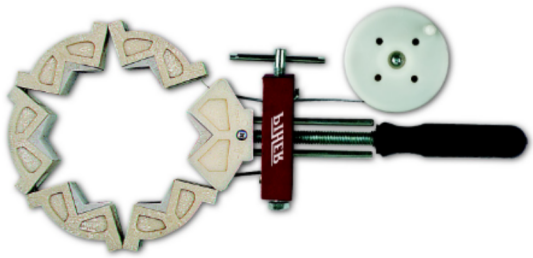

COD	MOD	Ancho width	Largo Length	Kg	
24007	HEX.	1,2 cm	500 cm	1,31	1



COD	MOD	Ancho width	Largo Length	Kg	
24003	OCT.	1,2 cm	500 cm	1,45	1

Main features:

- Texpered steel band keeping up a constant pressure
- Cast iron base
- Nylon angle grips
- Everly distibuted pressure thoughout.
- Accurate joints 100% guaranteed.

Materials and Finishing:

All raw materials without exception used in Ind. Piqueras tools come from countries within the European Union. This guarantees maximum quality and permits easy and full control.

FOUNDRY WORK	*Nodular cast iron base EN-GJS-400-15 quallity following UNE-EN-1563, ruling stabilising thermal treatment, shot blasted, phosphated and Epoxy-polyester painted electrostatically in red color RAL 3004
HANDLE	*Black PA6 handle
	*Body holding steel band,brakes and angled pieces in a natural steel colour
STEEL BAND	*CK675 tempered steel band 0,35 mm thick with rounded edges bluish grey finished. Ruling UNI-EN10132
SCREW	*White zinc plated steel screws without hexavalent Chromiun

The careful design also guarantees optimum mechanical perfomance.

Packing and labelling:

leach in its individual cardboard box
Individually coded label EAN-13

RULES:

No special safety rulings applied
All work carried out following ISO:9001 and ISO :14001 rules